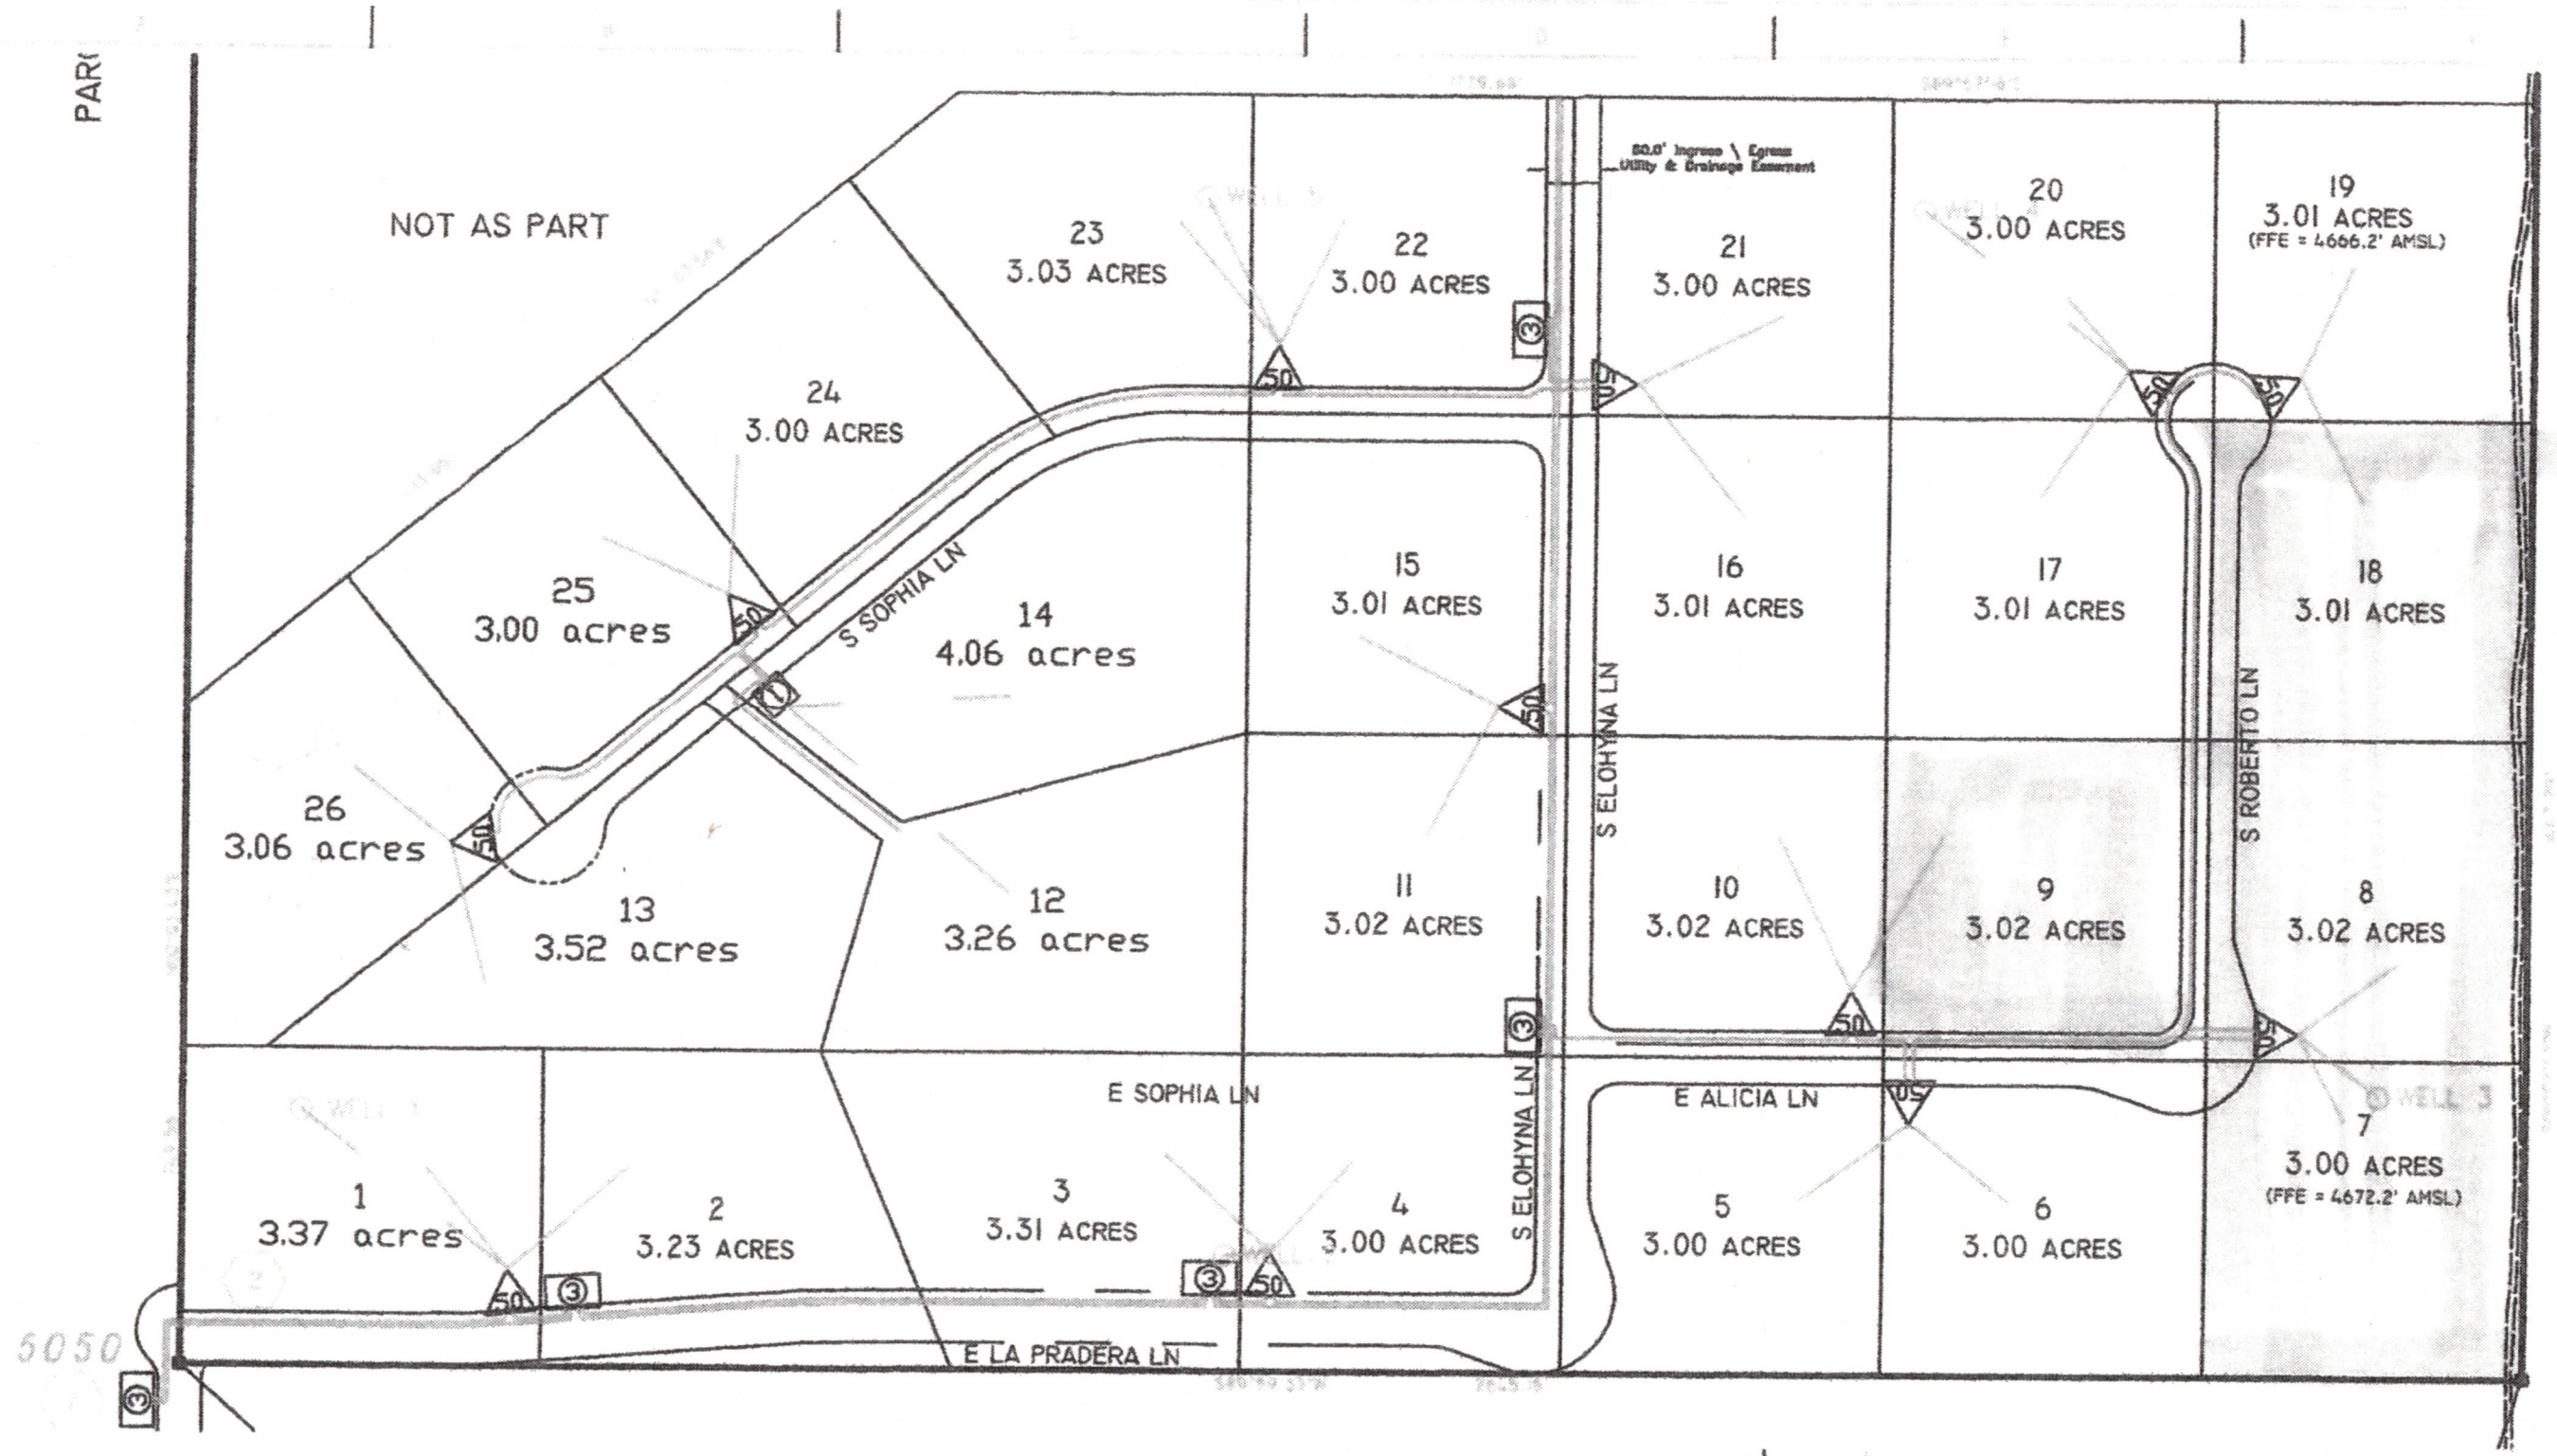



SSVEC LEGEND

■	MASTER METER CABINET (1 PHASE)
▣	MASTER METER CABINET (3 PHASE)
◘	SWITCH CABINET (1 PHASE)
▣	SWITCH CABINET (3 PHASE)
⊠	PULL CABINET (3 PHASE)
△	PULL CABINET (1 PHASE)
△	PAD MOUNT TRANSFORMER (1 PHASE) (26,37.5,50,75 KVA
▲	PAD MOUNT TRANSFORMER (3 PHASE)
⊗	RISER ON POLE (3 PHASE)
⊙	RISER ON POLE (1 PHASE)
□	SECONDARY PEDESTAL
✳	STREET LIGHT STEEL POLE (150 OR 250 WATT)
⬡	STAKING STATION NUMBER
600	600 AMP PRIMARY 500 OR 1000 MCM (3 PHASE)
3	200 AMP PRIMARY 1/0 OR 4/0 (3 PHASE)
2	200 AMP PRIMARY 1/0 OR 4/0 (2 PHASE)
1	200 AMP PRIMARY 1/0 OR 4/0 (1 PHASE)
SRC	200 AMP PRIMARY 1/0,4/0 OR 350 (1,3 PHASE)
C	CONDUIT ONLY NO CONDUCTOR

DATE SCHEDULE

		DATE
PREMILINARY DESIGN	C. Faulkner	2-16-04
STAKED		
CONSTRUCTION		

LOTS 1-26 (26 LOTS)

STAKING NOTES

PRIMARY EQUIPMENT

STAKE LOCATION FOR TRANSFORMERS AND OTHER PRIMARY EQUIPMENT INDICATES FRONT AND CENTER OF PAD, LOCATIONS ARE STAKED ON 20' OFFSETS WITH 2 SWING TIE STAKES.

SECONDARY EQUIPMENT

ALL SECONDARY EQUIPMENT PEDESTALS, STREETLIGHTS ARE STAKED ON 20' OFFSETS WITH 1 SWING TIE STAKE.

REFERENCE NOTES

1. UNLESS NOTED, INSTALL #1/0 AL25 PRIMARY CONDUCTOR IN 3" PVC.
2. INSTALL ONE SPARE CONDUIT AT EACH STREET CROSSING.
3. INSTALL ALL #4/0 TP SECONDARY IN 3" PVC.
4. INSTALL ALL #350 TP SECONDARY IN 4" PVC.
5. ALL LOCATION NUMBERS ARE L07-20-______
6. UNLESS NOTED, ALL STATIONS ARE STAKED ON 20' OFFSET.
7. CUSTOMER SHALL PROVIDE ALL REQUIRED TRENCH PER SSVEC AND J.U.C.C. TRENCH SPECS WITH JOINT TRENCH TO BE UTILIZED WHERE POSSIBLE. THE DEVELOPER SHALL PROVIDE 100% OF THE BEDDING AND SHADING MATERIAL. MATERIAL SHALL PASS THROUGH A 2" STANDARD SIEVE AND SHALL NOT HAVE SHARP EDGES. THIS PADDING MATERIAL SHALL BE OF SUFFICIENT QUANTITY TO PROVIDE 8" OF MATERIAL ALONG SIDE AND ABOVE THE PIPE, AND SHALL BE APPROVED BY SSVEC PERSONNEL PRIOR TO SSVEC INSTALLATION OF PIPE AND PADDING MATERIAL.

PRELIMINARY COPY
NOT AUTHORIZED FOR
CONSTRUCTION AT THIS TIME
PLANNING ONLY

TWO DAYS
BEFORE WORKING...
Call 1-800-782-5348 for
UTILITY LOCATIONS
BLUE STAKE CENTER



EQUIPMENT LOCATION DETAIL
(INTERIOR STREETS)

SULPHUR SPRINGS VALLEY ELECTRIC COOPERATIVE

Backfill Specifications

1. [illegible]
2. [illegible]
3. [illegible]
4. [illegible]
5. [illegible]
6. [illegible]

D:\DRAWINGS\SSVEC\XXXXX.dwg <USERNAME> DWG <PLOTTED> 01/29/01 @ 12:56

Sulphur Springs Valley
Electric Cooperative, Inc.

Trench Footage:

NO	REVISION	DATE	BY	APR

La Pradera Estates LLC
12751 E. Camino Ancho, Tucson AZ

ENGINEERING RECORD		DATE
DRAWN	C. Faulkner	7-7-06
DESIGNED	CBF	4-16-05
CHECKED	CBF	4-16-05
APPROVED	CBF	4-16-05
DWG SCALE: 1:120	PLT SCALE: 1:1	

FILE NO : D:\XXXXX

SSVEC LINE LAYOUT
LA PRADERA
PHASE 1
WORK ORDER # [illegible]

REVISION NO : 1